




# DK50 4x4VRT/M

for central air distribution systems

- modular design
- compact solution
- if one pump fails the rest continue to perform
- remote monitoring system
- wide range of optional equipment
- easy maintenance

## Options


- noise reduction covering
- central intake filter system
- enhanced drying and filtering

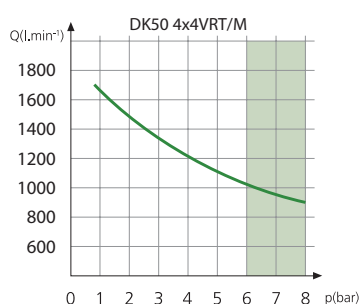

External text display with Ethernet port



Refrigeration dryer

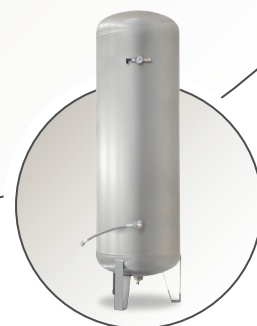

Air tank

	V/Hz	kW	l.min <sup>-1</sup> / 5 bar	lit.	bar	S1-S3	°C	dB[A]	kg	mm
DK50 4x4VRT/M								≤ 80	268 <sup>*3</sup> 66 <sup>*4</sup> 127 <sup>*5</sup>	1240 x 630 x 1750 <sup>*3</sup> 760 x 550 x 1015 <sup>*4</sup> 770 x 705 x 2100 <sup>*5</sup>
DK50 4x4VRTS/M	3x400/ 50	4x2,2	1040	500	6 - 8 <sup>*1</sup>	S1 - 100%	-22 <sup>*2</sup>	≤ 69	401 <sup>*3</sup> 66 <sup>*4</sup> 127 <sup>*5</sup>	1250 x 705 x 1790 <sup>*3</sup> 760 x 550 x 1015 <sup>*4</sup> 770 x 705 x 2100 <sup>*5</sup>

\*1 Other working pressures on demand. \*2 Degree of air drying (atmospheric dew point). \*3 Compressor. \*4 Refrigeration dryer. \*5 Air Tank. Technical modifications are subject to change.



EKOM spol. s r.o.  
Priemyselná 5031/18  
921 01 PIEŠŤANY  
Slovak Republic

tel.: +421 33 7967205  
fax: +421 33 7967223  
e-mail: ekom@ekom.sk  
www.ekom.sk

