




DK50 3x4VR/M

for central air distribution systems

- modular design
- compact solution
- if one pump fails the rest continue to perform
- wide range of optional equipment
- easy maintenance

Options

- enhanced drying
- additional filtration including filter street bypass

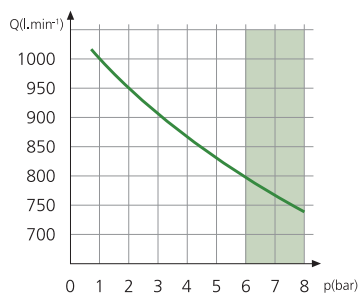

Filtration air (3µm)



Filtration air (5+0,1µm)



Refrigeration dryer

	/Hz		/5 bar			S1-S3	DRY			
	V/Hz	kW	l.min ⁻¹ / 5 bar	lit.	bar		°C	dB[A]	kg	mm
DK50 3x4VR/M	3x400/50	3x2,2	830	290	6 - 8* ¹	S1 - 100%	-22* ²	≤ 80	286* ³ 54* ⁴	1780x700 x1025* ³ 550x1460 x830* ⁴

*¹ Other working pressures on demand. *² Degree of air drying (atmospheric dew point). *³ Compressor. *⁴ Refrigeration dryer. Technical modifications are subject to change.



EKOM spol. s r.o.
Priemysel'na 5031/18
921 01 PIEŠŤANY
Slovak Republic

tel.: +421 33 7967205
fax: +421 33 7967223
e-mail: ekom@ekom.sk
www.ekom.sk

